

DIOSCURI

Famiglia di faretto incasso miniaturizzati multi-ottica

Family of multi-optic miniaturized recessed spotlights

Proiettore multi-ottica fisso per incasso in controsoffitto in cartongesso. Realizzato in pressofusione di alluminio e con bordo di battuta in colore bianco. Ottica secondaria antiabbagliamento in colore nero per un elevato confort visivo (UGR<19). Grado di protezione IP20, vano ottico IP44, classe di isolamento III, marchio F. Fornito completo di driver ON-OFF.

Fixed multi-optic projector for recessed installation in plasterboard false ceilings. Made of die-cast aluminum and with white edge. Black anti-glare secondary optic for high visual comfort (UGR <19). Degree of protection: IP20, optics IP44, electrical insulation class III, F mark. Supplied complete with ON-OFF driver.









Item: RL1452RF
Power: 2W
Beam angle: 45°
Output flux: 120 lm
Temp. Color: 3.000K
CRI: >90
Face ring: white
Driver: on-off (F),
IP20, O IP44



Item: RL2754RF
Power: 4W
Beam angle: 45°
Output flux: 240 lm
Temp. Color: 3.000K
CRI: >90
Face ring: white
Driver: on-off (F),
IP20, O IP44



Item: RL514710RF
Power: 10W
Beam angle: 45°
Output flux: 624 lm
Temp. Color: 3.000K
CRI: >90
Face ring: white
Driver: on-off (F),
IP20, O IP44

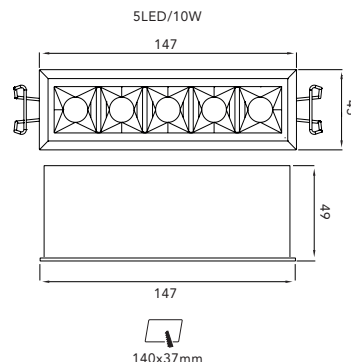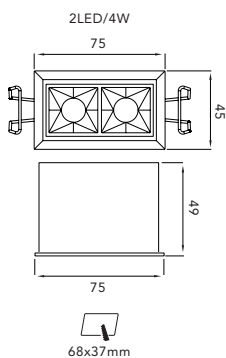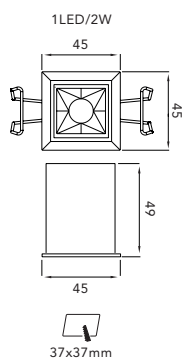

CODIFICA PRODOTTI / PRODUCT CODING

Family name	Dimension hole	Power LED (W)	With ring\trimless	Type of driver. On-off\Dali	Optical finish Black
RL1 \ RL2 \ RL5	45 \ 75 \ 147	2 \ 4 \ 10	R	F	